



# Elegant access solutions.

## Residential Series: IP intercom door station with 1.0MP camera

This Residential Series video intercom door stations is single channel, ideal for homes & single-premises buildings. The door station can be operated via a single backlit button or via NFC-capable card, with voice-prompting.

- 1/4" 1.0MP camera with 122° diagonal FOV
- Built-in microphone and speaker for 2-way talk
- Built-in NFC card reader for keycard access
- Connect with intercom monitor(s) via Ethernet
- Door control, alarm and RS485 input/output relays
- Intuitive, easy-to-use interface & PoE connection
- Weather resistant IP65 rated housing
- Power over Ethernet (12VDC, 802.3af)



Gate Control via Card


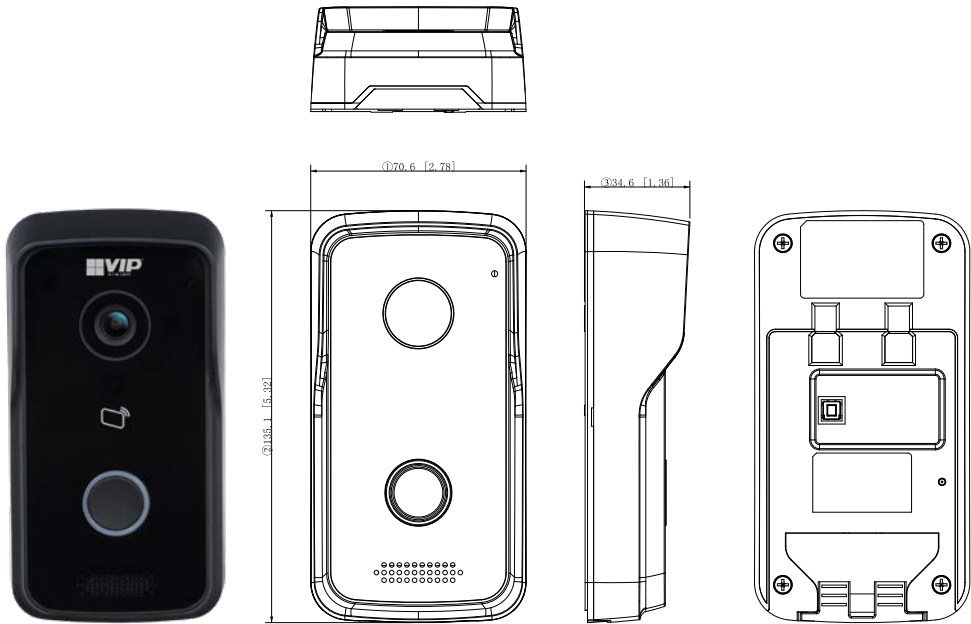


Remote Access & Answer via App



IP65 Weather Resistant

Residential Door Station | Series Specifications

Model		INTIPRDSJ
General	Product Image	
	Main Processor	Embedded Microprocessor
	Camera System	1/4" 1.0 Megapixel CMOS (Horizontal FoV: 122°)
	Low-Light Application	Day/Night ICR
	Card Support	Built-in NFC Card Reader
	Keypad	1 Mechanical Button
	Tamper Detection	Yes
	Input / Output	1 x alarm input / 1 x alarm output / 1 x RS485
	Audio / 2-Way Talk	Omni-directional Microphone & Embedded Loudspeaker for 2-way talk
	Internal MicroSD Slot	Yes, up to 64GB
	Ethernet / Network	10M/100Mbps Self-adaptive / TCP/IP protocol
	Max. Additional Door Stations	20
	Max. Indoor Monitors	10
	App Connection	QR Code
Environmental	Vandal Resistant	N/A
	Ingress Protection	IP65 (Front plate)
	Installation Options	Surface mount
	Construction	PC + Acrylic
	Installation Kit	N/A
	Power Input / Use	12VDC 1A, PoE (802.3af) / Operation < 5W
	Weight / Dimensions	0.32kg / 71 x 35 x 135mm
Accessories	Product Diagram	

Your local VIP Vision™ IP solutions professional:





# Elegant access solutions.

## Residential Series: IP intercom door station with 2.0MP camera

This Residential Series video intercom door stations is single channel, ideal for homes & single-premises buildings. The door stations features a 2.0MP camera with auto day/night IRC, all in a stylish aluminium body.

- 1/2.5" 2.0MP 1.95mm lens camera with 169° FOV
- Built-in microphone and speaker for 2-way talk
- Connect with intercom monitor(s) via Ethernet
- Intuitive, easy-to-use interface
- Alarm and RS485 input/output relays
- Connect & power via 2-wire or Power over Ethernet
- Weather & vandal resistant IP55/IK07 aluminium body
- Flush and surface mount installation options



Single Button Door Contact


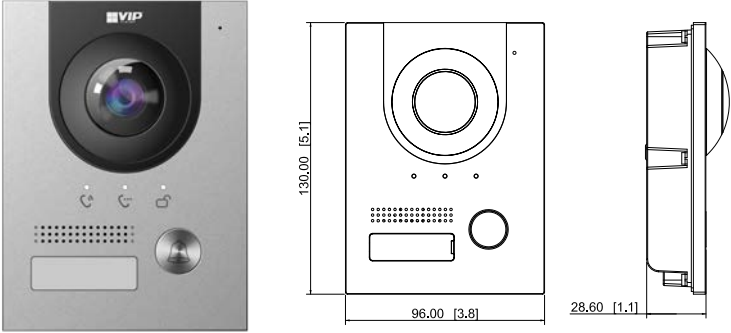



2-Wire or Ethernet Installation



Remote Access & Answer via App

## Residential Door Station | Series Specifications

Model		INTIPRDSG2
General	Product Image	
	Main Processor	Embedded Microprocessor
	Camera System	1/2.5" 2.0 Megapixel CMOS with 1.9mm lens (Horizontal FoV: 169°)
	Low-Light Application	Day/Night ICR
	Card Support	N/A
	Keypad	1 Mechanical Button
	Tamper Detection	Yes
	Input / Output	1 x alarm input / 1 x alarm output / 1 x RS485
	Audio / 2-Way Talk	Omni-directional Microphone & Embedded Loudspeaker for 2-way talk
	Internal MicroSD Slot	Yes, up to 64GB
	Ethernet / Network	10M/100Mbps Self-adaptive / TCP/IP protocol
	Max. Additional Door Stations	20
	Max. Indoor Monitors	10
	App Connection	QR Code
Environmental	Vandal Resistant	IK07
	Ingress Protection	IP55
	Installation Options	Supports surface box and flush box mount
	Construction	Aluminium
	Installation Kit	N/A
	Power Input	48VDC 1A, PoE (802.3af)
	Weight / Dimensions	0.35kg / 130 x 96 x 29mm
Accessories	Product Diagram	
	Mounting Options	
		Flush Box Mount (INTIPRDSG-FB) / Surface Box Mount (INTIPADSG-SB)

Your local VIP Vision™ IP solutions professional:



# For large gated residences.

## Residential Series: IP intercom villa outdoor station with 2.0MP camera

The Residential Series Outdoor Stations is a multi-functional solution for gated single or multi building dwellings. The series features centralised building management as well as comprehensive surveillance integration.

- 1/2.9" 2.0MP 2mm lens camera w/ 158° diagonal FOV
- Call residence for two-way talk via indoor monitor(s)
- Keypad for code unlock & NFC reader for card access
- Dials all monitors, up to 10 indoor monitors
- Backlit OLED interface & supplemental white light
- Intuitive, easy-to-use mechanical button interface
- Power over Ethernet (12VDC, 802.3af)
- IP65/IK08 weather & vandal resistant housing



**Gate Control via Keypad or Card**





**Remote Access & Answer via App**



**Weather & Vandal Resistant**

## Residential Outdoor Station | Series Specifications

	Model	INTIPRDSD
General	Main Processor	Embedded Microprocessor
	Low Light Visibility	Backlit 2.3" OLED, Supplemental White Light (AGC)
	Door Control	1 x Relay Out / 1 x RS485 / 1 x Feedback / 1 x Exit Button / 1 x Wiegand In
	Card Support	Yes
	Tamper Detection	Yes
	Camera System	1/2.9" 2 Megapixel CMOS with 2mm lens (Diag. FoV: 158°)
	Audio Input	Omni-directional Microphone
	Audio Output	Embedded Loudspeaker
	Bidirectional Talk	Support
	Ethernet	10M/100Mbps Self-adaptive
	Network Protocol	TCP/IP
	Max. Additional Door Stations	20
	Max. Indoor Monitors	10
App Connection	QR Code	
Environmental	Vandal Resistant	IK08
	Ingress Protection	IP65 (Front plate)
	Installation	Surface mount / Flush mount
	Power Input	12VDC, PoE (802.3af)
	Power Consumption	Standby <2W / Operation <7W
	Dimensions	200 x 98 x 32mm
	Weight	1.50kg

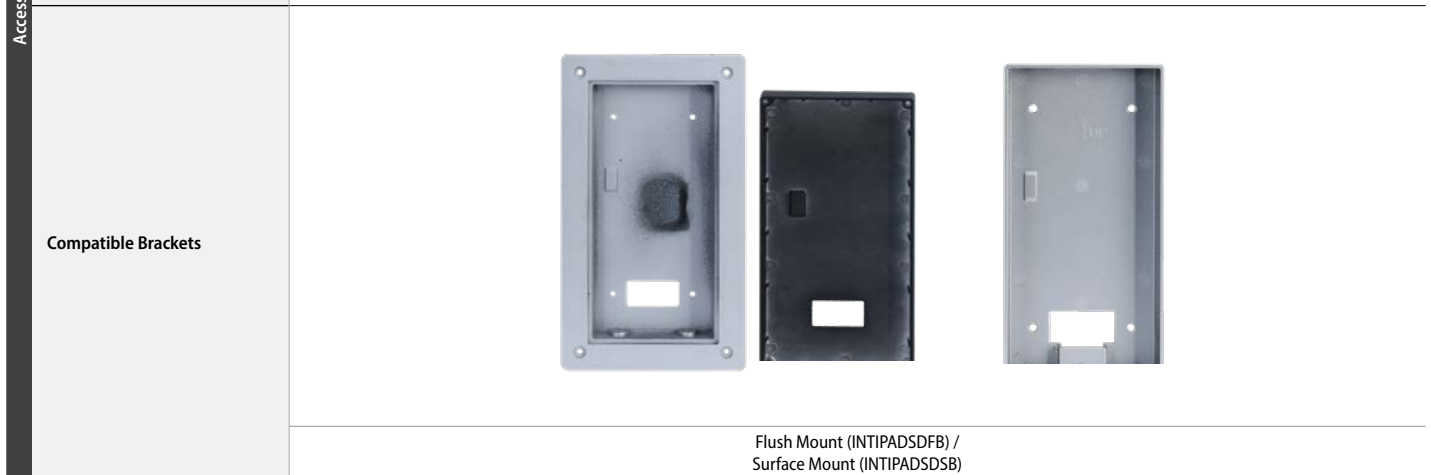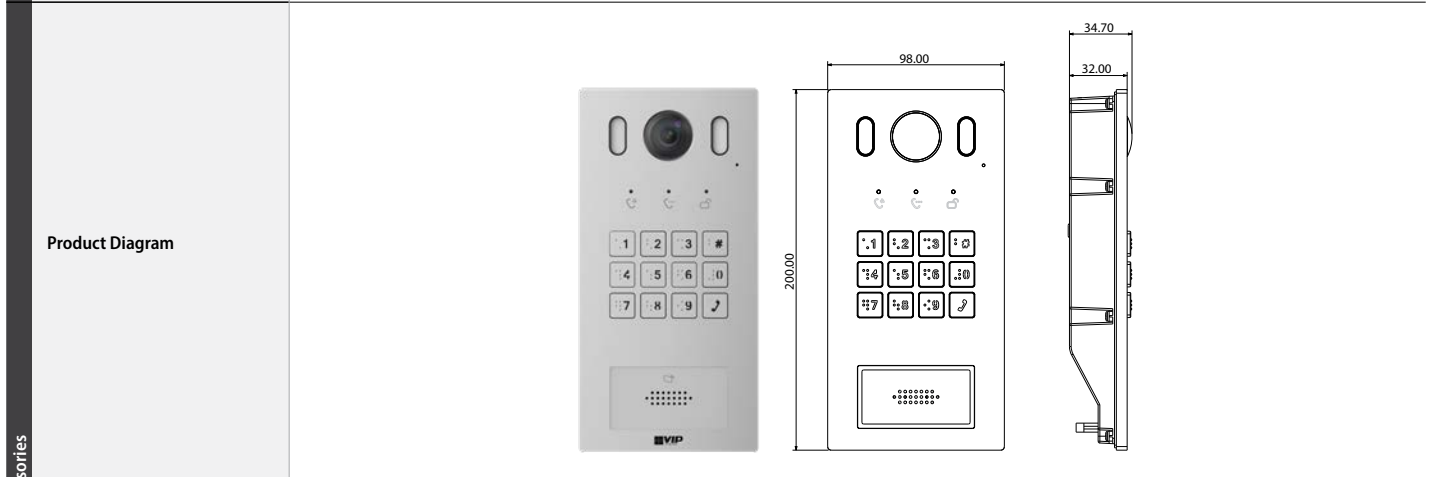

Your local VIP Vision™ IP solutions professional:





# Elegant access solutions.

## Residential Series: IP intercom door stations with 2.0MP camera

These Residential Series video intercom door stations is ideal for homes and multi-premises buildings such as duplexes. The door stations features a 2.0MP camera with auto day/night IRC, all in a stylish aluminium body.

- 1/2.8" 2.0MP 1.9mm lens camera with 140° FOV
- Built-in microphone and speaker for 2-way talk
- Built-in NFC card reader for keycard access
- Connect with intercom monitor(s) via Ethernet
- Door control, alarm and RS485 input/output relays
- Intuitive, easy-to-use interface
- Weather & vandal resistant IP65/IK08 aluminium body
- Power over Ethernet (12VDC, 802.3af)



Gate Control via Card





Remote Access & Answer via App



Weather & Vandal Resistant

Residential Door Station | Series Specifications

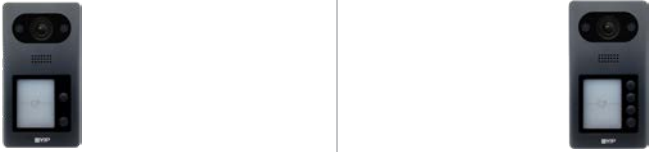Model	INTIPDDS2	INTIPDDS4	
General			
	Main Processor		Embedded Microprocessor
	Camera System		1/2.8" 2.0 Megapixel CMOS with 1.9mm lens (Horizontal FoV: 140°)      1/2.8" 2.0 Megapixel CMOS with 1.9mm lens (Horizontal FoV: 134°)
	Low-Light Application		Day/Night ICR
	Card Support		Built-in NFC Card Reader
	Keypad		2 Mechanical Buttons      4 Mechanical Buttons
	Tamper Detection		Yes
	Input / Output		1 x relay for door control / 2 x channel alarm interface (1 x unlock button, 1 x feedback) / 1 x RS485
	Audio / 2-Way Talk		Omni-directional Microphone & Embedded Loudspeaker for 2-way talk
	Internal MicroSD Slot		N/A
	Ethernet / Network		10M/100Mbps Self-adaptive / TCP/IP protocol
	Max. Additional Door Stations		20
	Max. Indoor Monitors		22 (11 per button)      44 (11 per button)
	App Connection		QR Code
Environmental	Vandal Resistant		IK08
	Ingress Protection		IP65
	Construction		Aluminium
	Installation Kit		N/A
	Power Input / Use		12VDC, PoE (802.3af) / Standby < 1W / Operation < 7W      12VDC, PoE (802.3af) / Operation < 6W
Weight / Dimensions		0.80kg / 182 x 101 x 30mm	
Accessories			
Product Diagram			

Your local VIP Vision™ IP solutions professional:





# Modern access solutions.

## Residential Series: Touchscreen PoE IP intercom monitors

These modern IP intercom door monitors are ideal for homes or businesses. These modern intercom monitors features video & two way talk, remote access via smartphone and PoE compatibility.

- Slim 7" touchscreen indoor intercom monitor
- Connect to door stations and monitors via Ethernet
- Embedded 8GB storage & microSD slot up to 32GB
- Integrates with most electronic sensors & alarms
- Dual-way bidirectional talk with echo suppression
- Receive visitor notifications, leave audio & video messages, remote view, remote unlock and 2-way talk via iOS & Android devices



**7" Slimline Touchscreen Monitors**





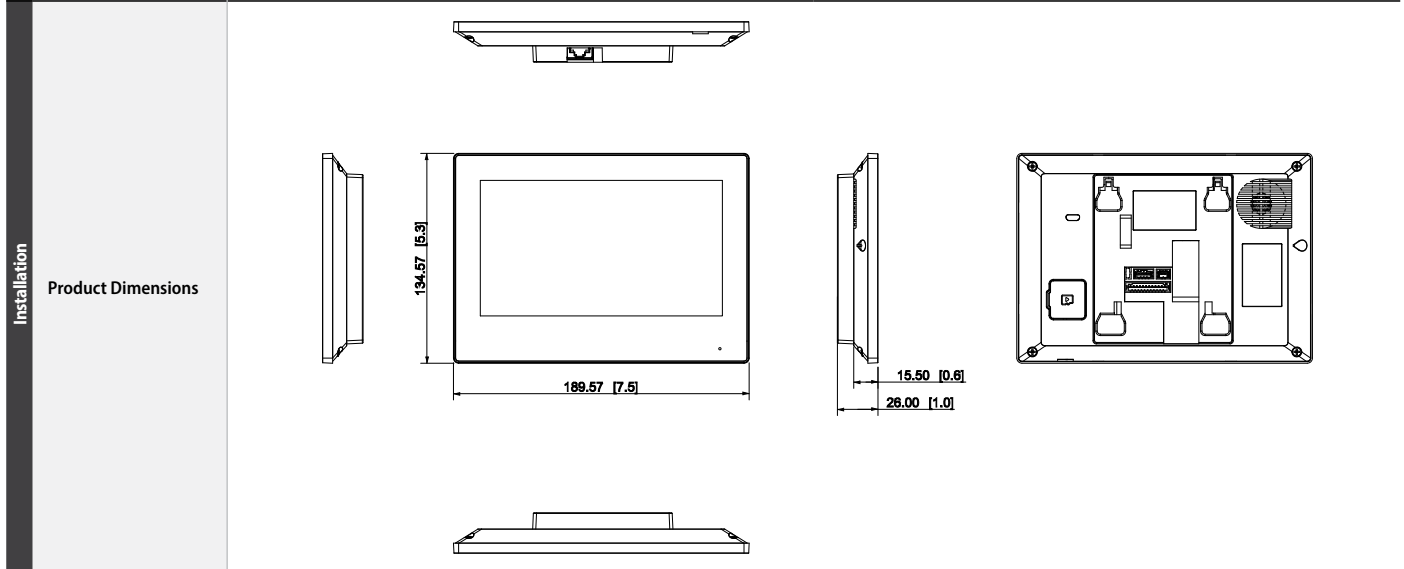
**Connect & power over Ethernet**



**Two-way talk & Remote Unlock**

Residential Indoor Monitors | Series Specifications

Model	INTIPMONKW (White)	INTIPMONKWB (Black)
Monitor	Product Image	
		
		
	Main Processor	
	Display Size	
	Video Compression	
	Alarm Support	
Audio	Internal Capacity	
	Ethernet / Network	
	Audio / 2-Way Talk	
	Bidirectional Talk	
General	Audio Enhancement	
	Audio Compression	
	Installation	
	Material	
	Operating Temperature	
	Power Input / Use	
	Weight / Dimensions	



Your local VIP Vision™ IP solutions professional:



# Modern access solutions.

## Residential Series: Large touchscreen PoE IP intercom monitor

These modern IP intercom door monitors are ideal for homes or businesses. This large modern intercom monitor features video & two way talk, remote access via smartphone and PoE compatibility.

- Slim 10" touchscreen indoor intercom monitor
- Connect to door stations and monitors via Ethernet
- Embedded 8GB storage for edge recording
- Integrates with most electronic sensors & alarms
- Dual-way bidirectional talk with echo suppression
- Receive visitor notifications, leave audio & video messages, remote view, remote unlock and 2-way talk via iOS & Android devices



**10" Slimline Touchscreen Monitor**




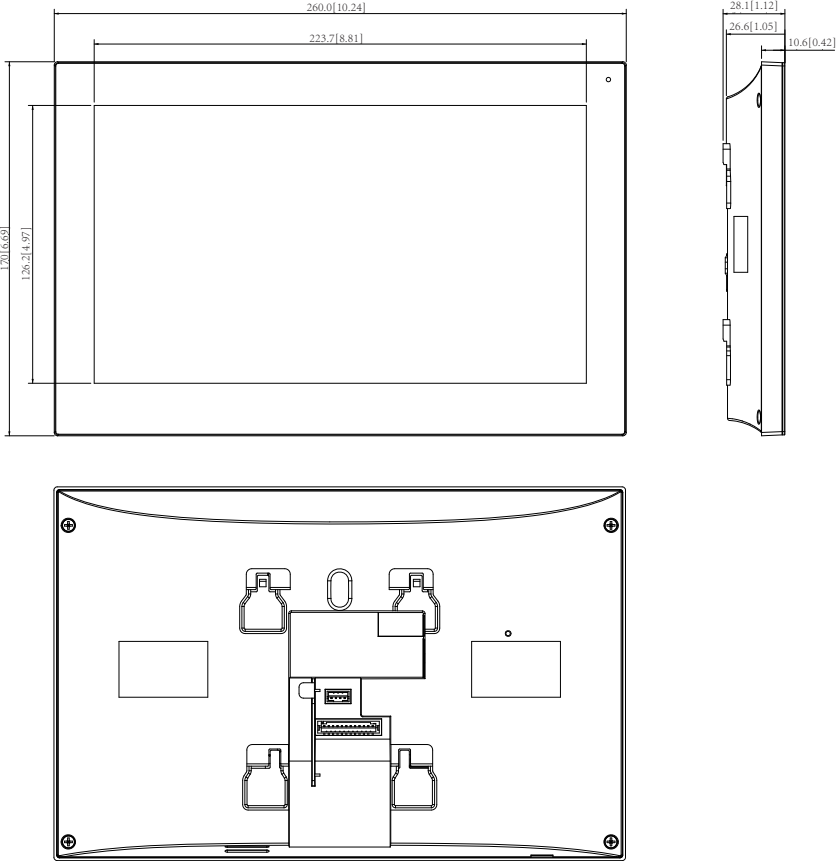
**Connect & power over Ethernet**



**Two-way talk & Remote Unlock**



## Residential Large Indoor Monitor | Series Specifications

Model		INTIPMONGBL
Monitor	Product Image	
	Main Processor	Embedded Microprocessor
	Display Size	10" Colour TFT LCD (1024 x 600) Capacitive Touchscreen
	Video Compression	H.264
	Alarm Support	6 Input / 1 Output
	Internal Capacity	Embedded 8GB SD card
	Ethernet / Network	1 x RJ45, 10/100Mbps Self-adaptive
Audio	Audio / 2-Way Talk	Omni-directional Microphone / Embedded Loudspeaker
	Bidirectional Talk	Support
	Audio Enhancement	Supports echo suppression / DNR
	Audio Compression	G.711a, G.711Mu, G.711u, PCM
General	Installation	Surface Mount
	Material	PC + ABS Plastic
	Operating Temperature	-10 ~ +55°C / 10 ~ 90%RH (max.)
	Power Input / Use	12VDC / 1A, PoE (802.3af) / Operation <7W
	Weight / Dimensions	0.92kg / 260 x 170 x 28mm
Installation	Product Dimensions	 <p>Technical drawing showing front, side, and back views of the monitor with dimensions in mm and inches:</p> <ul style="list-style-type: none"> <li>Front View: <ul style="list-style-type: none"> <li>Top width: 260.0 [10.24]</li> <li>Inner width: 223.7 [8.81]</li> <li>Left height: 170.1 [6.69]</li> <li>Inner height: 126.2 [4.97]</li> </ul> </li> <li>Side View: <ul style="list-style-type: none"> <li>Top thickness: 28.1 [1.12]</li> <li>Mounting bracket thickness: 26.6 [1.05]</li> <li>Bottom thickness: 10.6 [0.42]</li> </ul> </li> <li>Back View: Shows mounting holes and internal components.</li> </ul>

Your local VIP Vision™ IP solutions professional:



# Modern access solutions.

## Residential Series: Touchscreen PoE IP intercom monitors with handset

These modern IP intercom door monitors are ideal for homes or businesses. The monitor communicates with the apartment door station via handset, and features live-view of the door station camera, along with remote access.

- 7" touchscreen indoor intercom monitor with handset
- Connect to door stations and monitors via Ethernet
- MicroSD card slot (up to 32GB) for edge recording
- Integrates with most electronic sensors & alarms
- Dual-way bidirectional talk with echo suppression
- Receive visitor notifications, leave audio & video messages, remote view, remote unlock & 2-way talk
- Desktop mounting bracket available (*sold separately*)



**7" Touchscreen Handset Monitors**







**Two-way Talk & Remote Unlock**



**Wall & Desktop Mounting Options**

Residential Indoor Monitors | Series Specifications

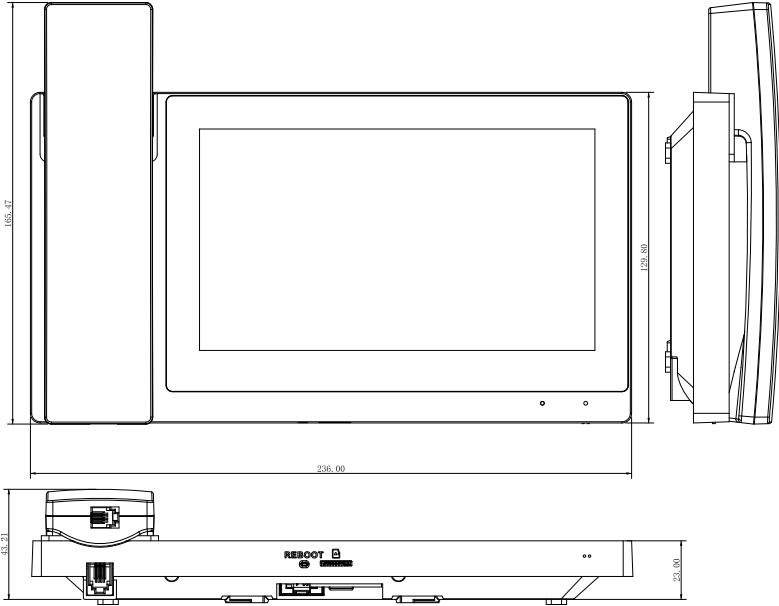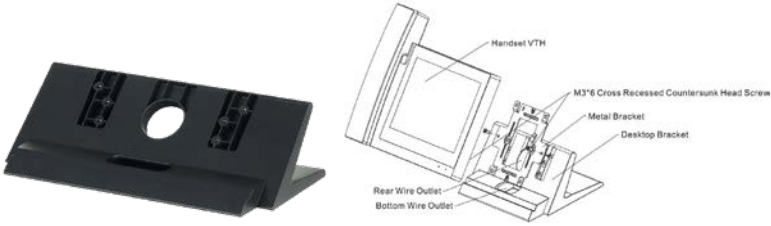Model	INTIPMONDWH2 (White)	INTIPMONDBH2 (Black)	
Monitor	 		
	Main Processor		Embedded Microprocessor
	Display Size		7" Colour TFT LCD (1024 x 600) Captive Touchscreen
	Video Compression		H.264
	Alarm Support		6 Input channels / 1 output channel
	Internal Capacity		MicroSD slot up to 32GB
	Ethernet / Network		1 x RJ45, 10/100Mbps Self-adaptive
Audio	Audio / 2-Way Talk		Embedded Loudspeaker / Handset Support
	Bidirectional Talk		Support
	Audio Enhancement		Supports echo suppression / DNR
	Audio Compression		G.711a, G.711Mu, G.711u, PCM
General	Installation		Surface mount / Optional bracket (INTIPMONDH-B) for desktop mount
	Material		PC + ABS Plastic
	Operating Temperature		-10 ~ +55°C / 10 ~ 90%RH (max.)
	Power Input / Use		12VDC / 1A, PoE (802.3af) / Operation <5W
	Weight / Dimensions		0.90kg / 236 x 166 x 42mm
Installation	Product Dimensions		
	Compatible Brackets		 <p>Desktop Mount Bracket (INTIPMONDH-B)</p>

Your local VIP Vision™ IP solutions professional:





# Modern intercom solutions.

## Residential J Series: PoE IP intercom system for home & business

The Residential J Series IP kit is an intercom solution suitable for homes & single premise buildings. This kit includes everything necessary for a simple, single door station & monitor intercom system. Experience video, two-way talk and remote access, plus there is room to expand with additional door stations or intercom monitors.

- 1.0 megapixel door station (Horizontal FoV: 122°)
- Door station calls all connected indoor monitors
- Connect door stations & monitors via Ethernet
- Intuitive interface, for ease-of-use for any visitors
- Interface with most electronic door strikes & sensors
- Slim profile 7" touchscreen indoor intercom monitor
- Dual-way bidirectional talk with echo suppression
- Receive visitor notifications, leave audio & video messages, remote view, remote unlock and 2-way talk via iOS & Android devices



**7" Slimline Touchscreen Monitor**



**Connect with Power over Ethernet**



**Two-way talk & Remote Unlock**

## Residential J Series Kit | Contents



**1 x Door Station**  
INTIPRSDSJ  
Residential PoE IP Intercom  
Door Station



**1 x Black Monitor**  
INTIPMONKB  
Residential PoE IP Intercom  
Monitor (Black)




**1 x 10/100 PoE Switch**  
VSPOE-SWA4L  
4 Port Unmanaged PoE  
Switch

## Residential J Series Kit | Series Specifications


Model	IP Monitor
Product Image	
Main Processor	Embedded Processor
Display Size	7" Colour TFT LCD (1024 x 600) Captive Touchscreen
Audio	Omni-directional Microphone & Built-in Speaker for 2-way Talk
Input / Output	6 x Alarm Input / 1 x Alarm Output / 1 x RS485
Internal Storage	Built-in 8GB, MicroSD slot up to 32GB *Unit must be opened to access microSD slot*
Ethernet/ Network	10M/100Mbps
Protection	Indoors only
Construction	PC + ABS
Installation	Surface mount
Power Input	12VDC / 1A, PoE (802.3af)
Power Consumption	Standby: <2W / Operation: <6W
Operating Conditions	-10 ~ +55°C / 10 ~ 95%RH (max.)
Weight / Dimensions	0.34kg / 189.6 x 134.6 x 26mm

Model	IP Door Station
Product Image	
Main Processor	Embedded Processor
Camera System	1/1.4" 1.0 Megapixel CMOS with 2.2mm lens (Diagonal FoV: 122°)
Low-Light Application	Backlit interface / Day/Night ICR
Tamper Detection	Yes
Input / Output	1 x Alarm Input / 1 x Alarm Output
Audio	Omni-directional Microphone & Built-in Speaker for 2-way Talk
Internal Storage	MicroSD (Up to 64GB)
Protection	IP65 Ingress Protection
Construction	PC + Acrylic
Installation Kit	Surface mount
Power Input	12VDC / 1A, PoE (802.3af)
Power Consumption	Standby: <2W / Operation: <6W
Operating Conditions	-30°C ~ +60°C / ≤95% RH
Weight / Dimensions	0.25kg / 135 x 70 x 34mm

## Residential J Series Kit | Diagram

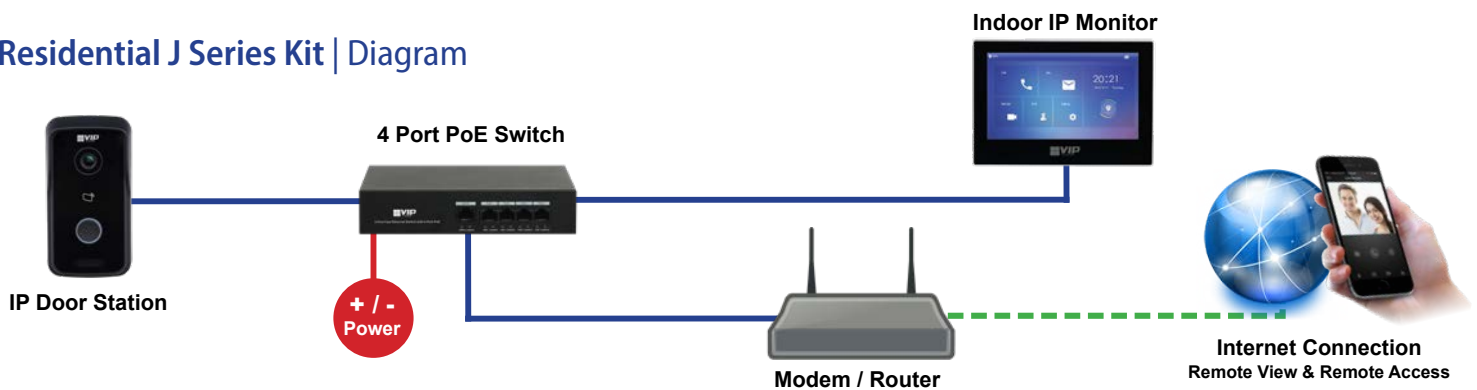

Your local VIP Vision™ IP solutions professional:

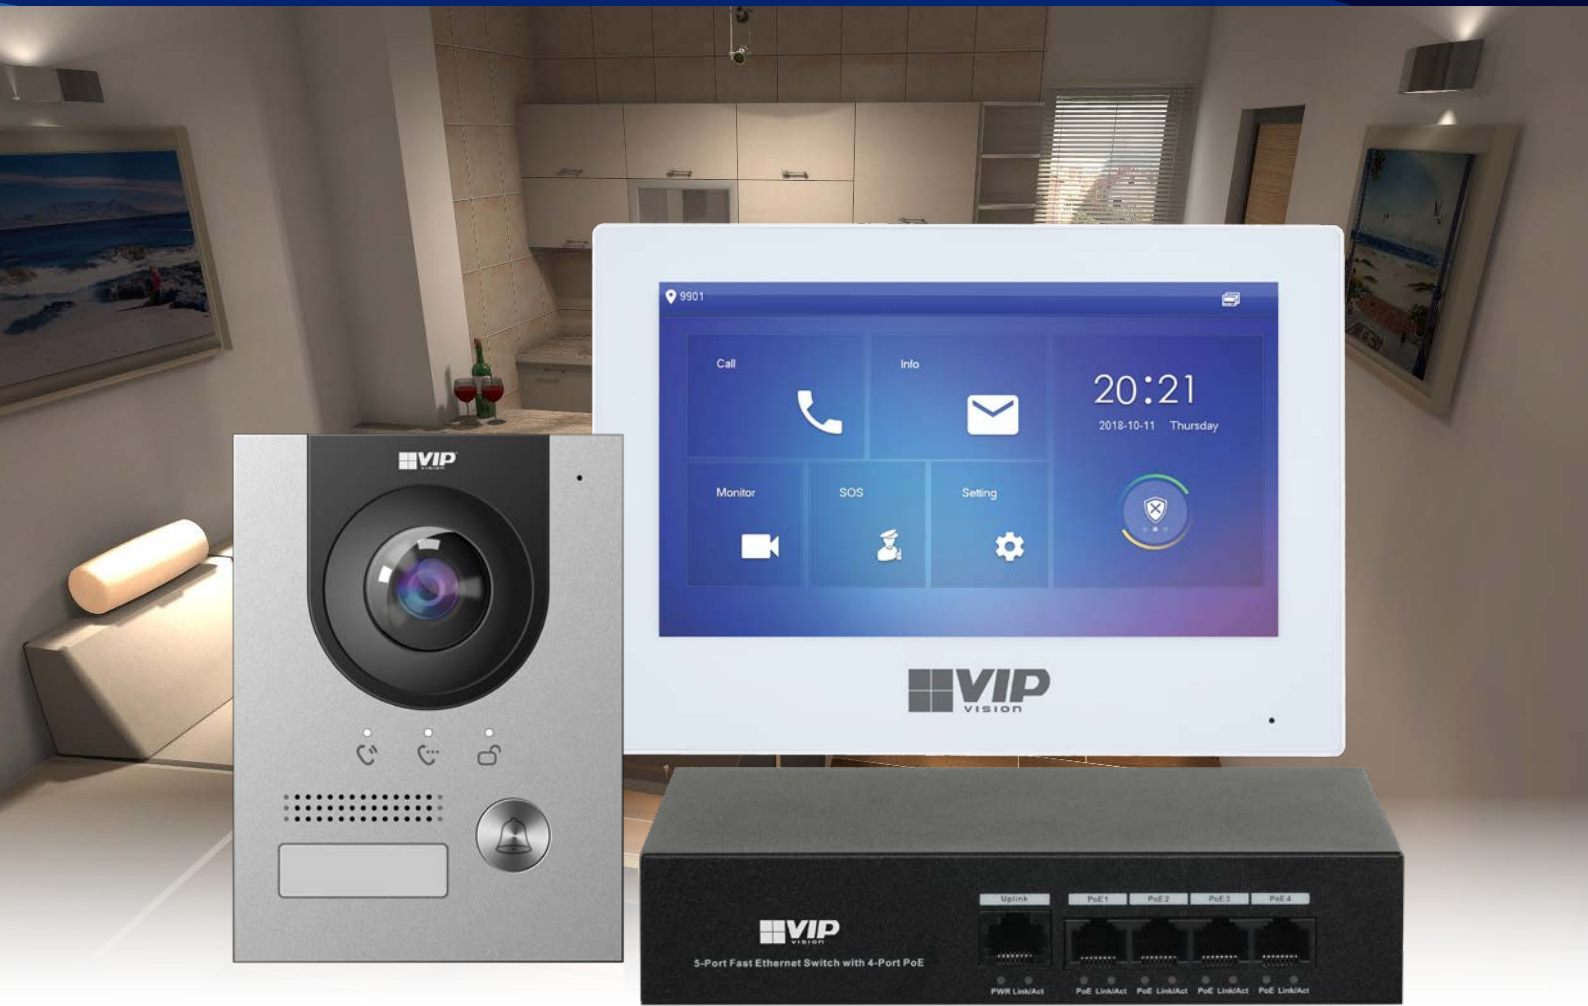

# Modern Intercom solutions.

## Residential G-P Series: Complete IP intercom kit for homes

The Residential G-P Series IP kit is an intercom solution suitable for homes & single premise buildings. This kit includes everything necessary for a simple, single door station & monitor intercom system. Experience video, two-way talk and remote access, plus there is room to expand with additional door stations or intercom monitors.

- Includes 1 x Door Station, 1 x Monitor & 1 x PoE Switch
- Door station with 2.0 megapixel fisheye camera
- Slim profile 7" touchscreen indoor intercom monitor
- Door stations call all connected indoor monitors
- Intuitive interface, for ease-of-use for any visitors
- Interface with most electronic door strikes & sensors
- Connect door stations & monitors via Ethernet
- Receive visitor notifications, leave audio & video messages, remote view, remote unlock and 2-way talk via iOS & Android devices



**7" Slimline Touchscreen Monitor**




**Connect with Power over Ethernet**




**Two-way talk & Remote Unlock**




## Residential G Series Kit | Series Specifications

Model	IP Door Station
Product Image	
<b>Operation</b>	
Main Processor	Embedded Processor
Camera System	2.0 Megapixel CMOS fisheye camera with 2.0mm lens (FoV: 140°H)
Low-Light Application	Auto IR & WDR (120dB)
Tamper Detection	Yes
Input / Output	1 x Alarm Input / 1 x Alarm Output / 1 x RS485 / 1 x Exit Button / 1 x Door Station Detection / 1 x Lock Control
Audio	Omni-directional Microphone & Built-in Speaker for 2-way Talk
Internal Storage	MicroSD (Up to 64GB)
<b>General</b>	
Protection	IK07 Vandal Protection / IP65 Ingress Protection
Construction	Aluminium
Installation Kit	Surface box (included) / Flush box (not included)
Power Input	12VDC, PoE (802.3af)
Power Consumption	<12W
Operating Conditions	-30°C ~ +60°C / ≤90% RH
Weight / Dimensions	0.35kg / 130 x 96 x 29mm

Model	IP Monitor
Product Image	
<b>Operation</b>	
Main Processor	Embedded Processor
Display Size	7" Colour TFT LCD (1024 x 600) Captive Touchscreen
Audio	Omni-directional Microphone / Embedded Loudspeaker
Input / Output	6 alarm Input / 1 alarm output
Internal Storage	MicroSD slot up to 32GB *Unit must be opened to access microSD slot* *Unit does not store snapshots or videos*
Ethernet/ Network	1 x 10/100Mbps
<b>General</b>	
Protection	Indoors only
Construction	PC + ABS
Installation	Surface mount
Power Input	12VDC / 1A, PoE (802.3af)
Power Consumption	Operation: <6W
Operating Conditions	-10 ~ +55°C / 10 ~ 95%RH (max.)
Weight / Dimensions	0.34kg / 189.6 x 134.6 x 26mm

## Residential G-P Series Kit | Diagram

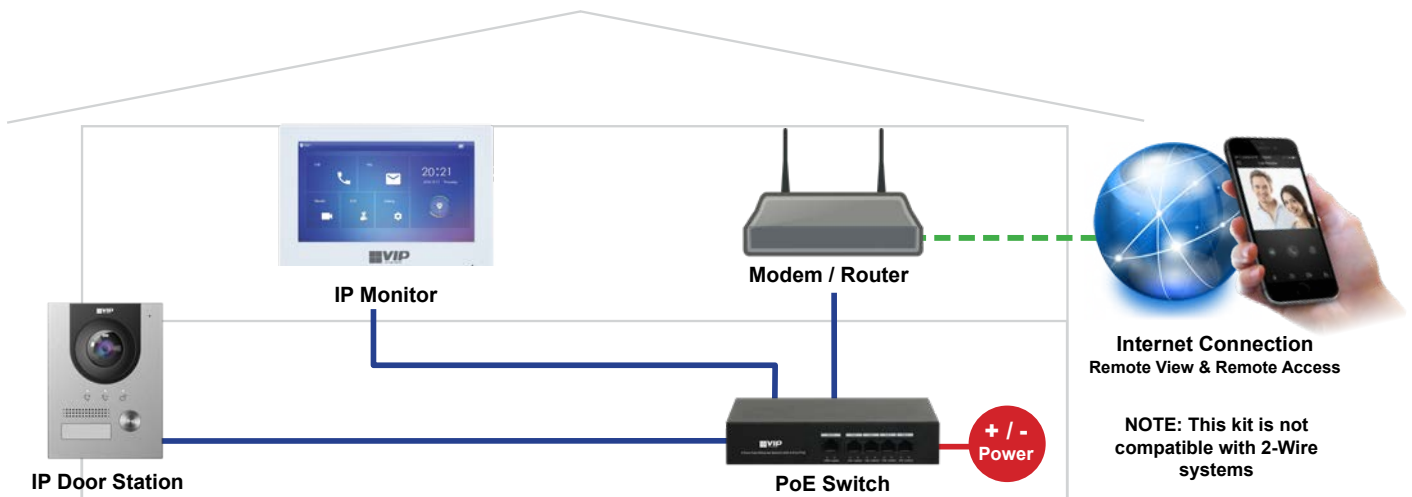

## Residential G-P Series Kit | Contents



**1 x Door Station**  
Residential PoE IP Intercom Door Station



**1 x White Monitor**  
Residential PoE IP Intercom Monitor (White)



**1 x 10/100 PoE Switch**  
4 Port Unmanaged PoE Switch



**1 x Surface Mount**  
Surface Mount Box for INTIPRDSG

Your local VIP Vision™ professional: